




注:1. FPC用我司型号.
2. 为方便贵司装机, 触摸屏外围尺寸比液晶尺寸每边缩小0.5MM.
3. 下图已标注逻辑.
请注意以下各个尺寸是否符合要求, 谢谢.

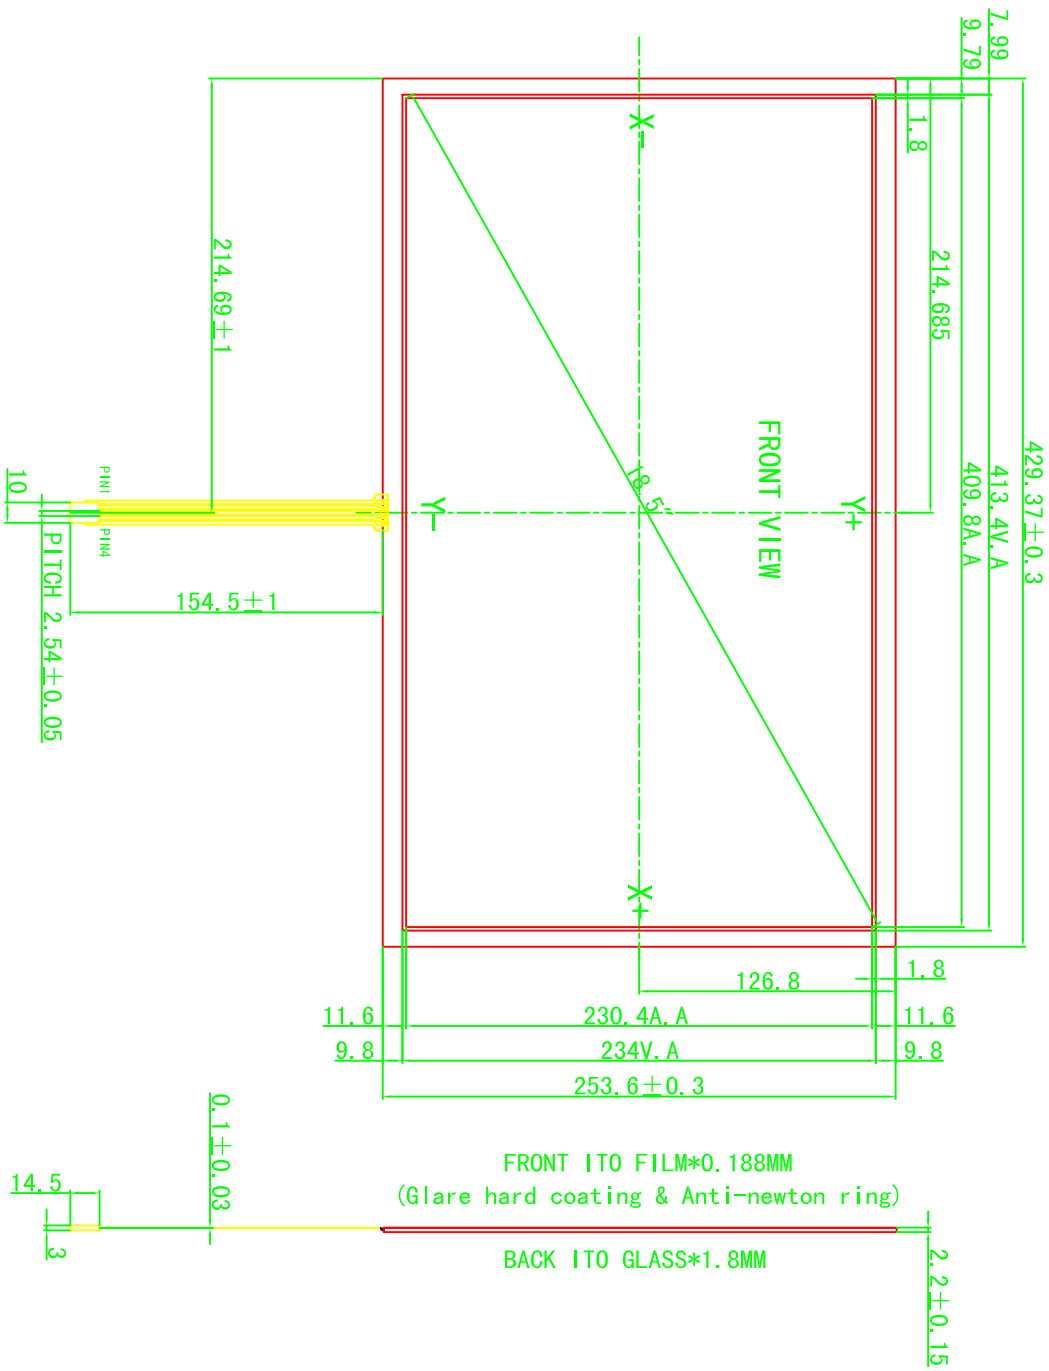

PIN	OUT
1	X-
2	Y-
3	X+
4	Y+

Notes:

1. Type: Film to Glass
2. Operating Voltage: $\leq 10V$
3. Operation Temperature: $-10^{\circ}C \sim 60^{\circ}C$
Storage Temperature: $-20^{\circ}C \sim 70^{\circ}C$
4. Life Time: $> 1, 000, 000$ times
5. Connect Material: T080FPC
6. Response Time: $\leq 10ms$
7. Linearity: $\leq 1.5\%$
8. Transmittance: $\geq 78.7\%$
9. Surface Hardness $\geq 3H$ (pencil I)
10. Operation force: $20g \sim 80g$
11. Resistance: X: $530 \Omega \sim 1060 \Omega$
Y: $160 \Omega \sim 460 \Omega$

TopTouch

TopTouch Electronics Co., LTD.

MODEL NO.

TTW4185001

PROJECT NO.

TT081202301

DRAWN:

Rein

DATE:

08/12/16

VERSION:

1.0

UNIT:

MM

TOLERANCE:

± 0.2

SCALE:

1:1

REV:

VERSION	MARK	MODIFY	DATE