


注:1. FPC为单面, 用我司型号.

VERSION	MARK	MODIFY	DATE
2.0		修改V, A, A区尺寸	08/11/10
3.0		更改FPC位置与逻辑	08/12/12

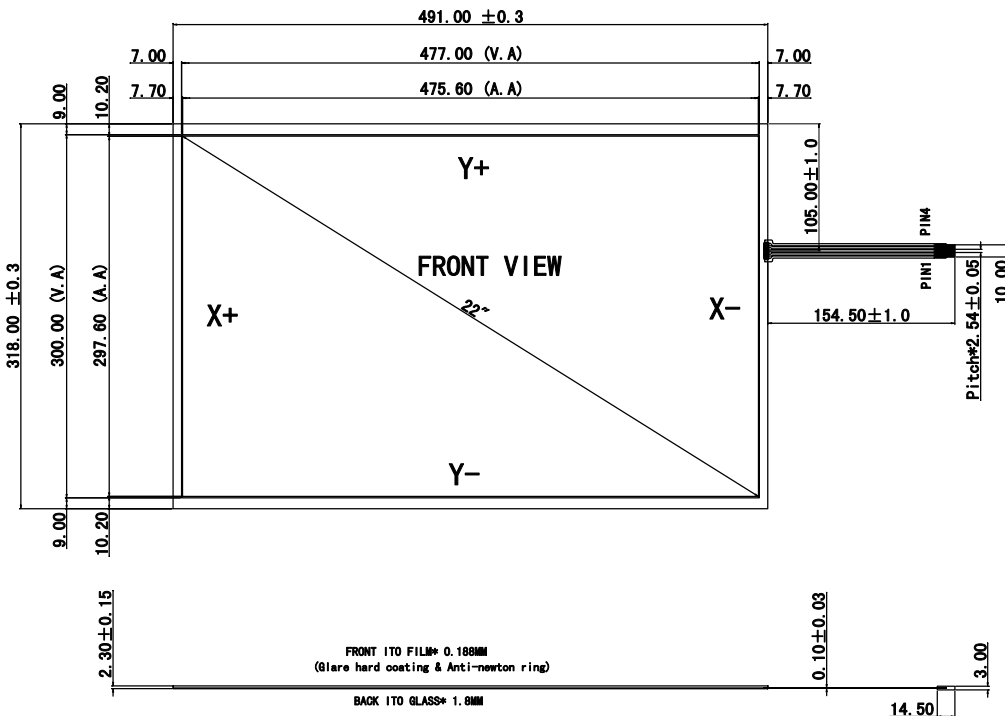

PIN	OUT
1	Y-
2	X-
3	Y+
4	X+

Notes:

1. Type: Film to Glass
2. Operating Voltage: $\leq 10V$
3. Operation Temperature: $-10^{\circ}C \sim 60^{\circ}C$
Storage Temperature: $-20^{\circ}C \sim 70^{\circ}C$
4. Life Time: $> 1,000,000$ times
5. Connect Material: T080 FPC
6. Response Time: $\leq 10ms$
7. Linearity: $\leq 1.5\%$
8. Transmittance: $\geq 78.7\%$
9. Surface Hardness $\geq 3H$ (pencil)
10. Operation force: $20g \sim 80g$
11. Resistance: X: $450 \Omega \sim 1030 \Omega$
Y: $150 \Omega \sim 500 \Omega$

TopTouch
ShenZhen TopTouch Electronics Co., LTD.

MODEL NO.	DRAWN:	DATE:	VERSION:	UNIT:	TOLERANCE:	SCALE:	REV:
TTW4220002	FU	2008/12/12	3.0	MM	± 0.3		