



TOP-TOUCH ELECTRONICS CO., LTD

Sample Approval

Supplier Name: Top-Touch Electronics Co., Ltd

Supplier Add: Shenyue Industry Zone, Li quang Village, Guan lan Town, Bao'an District, Shenzhen, China

Part number: TTW5220003

Description: 5 Wires Resistive Type

Top-Touch Approve:

Engineering	Technology	QA	Sales	Approve	Remark
Kitty					

Customer Approve:

Engineering	QA	Project Management	Other



TOP-TOUCH ELECTRONICS CO., LTD

5 Wires Touch Panel Product Specification

Structure : PET----- **Glare hard coating & Anti-Newton Ring**
Glass-----Chemically strengthened ITO glass1.8 mm
Dot Pitch-----**4.5mm×4.5mm**
Connector: FPC(5-Pin)


General Specifications:

Item	Specifications	Unit
Dimensional Outline	494.00 (L) ×315.00 (W)	mm
Viewing Area	468.00(L) ×294.00 (W)	mm
Active Area	468.00(L) ×294.00 (W)	mm

		Touch Panel Specification	Issue No.		
SET	Index		Page	1	
<p>1. Index 01</p> <p>2. Apply To Specification 02</p> <p>3. Dimension 03</p> <p>4. Optical Performance 04</p> <p>5. Electrical Performance 04</p> <p>6. Trust Test 05 06</p> <p>7. Appearance Inspection Standard 07</p> <p>8. Packing & Others 08</p>					
AMEND NO		TOP-TOUCH ELECTRONICS CO., LTD	APPROVAL BY	CHECK BY	PREPARE BY
AMEND DATE					
PUBLISH DATE					

	Touch Panel Specification		Issue No.		
SET	Apply To Specification		Page	2	
<p>1. Suitability This specification suit analog resistance touch panel.</p> <p>2. Apply To Specification</p> <p>2.1.Surface Hardness: 3H</p> <p>2.2. Optical Clarity: 78.7%↑</p> <p>2.3 Operating Temperature : -10°C ~ 60°C</p> <p>2.4 Endurance Test strikes : Over 10 million</p> <p>2.5 Operating Voltage: DC5V</p> <p>2.6 Resistance: 30Ω ~ 350Ω</p> <p>2.7 Linearity: < 5%</p> <p>2.8 Faceplate Surface : Glare hard coating & Anti-Newton Ring</p> <p>2.9 Operation Pressure : 15 ~ 70g</p> <p>2.10 Storage Temperature: -20°C ~ 70°C</p> <p>2.11 Message Noise: 5 m sec ~ 15 m sec</p> <p>2.12 Operating Current: 5mA ~ 25mA</p> <p>2.13 Isolation Resistance: 20MΩ↑ @DC25V</p> <p>3. Dimension Size Refer diagram I</p>					
AMEND NO		TOP-TOUCH ELECTRONICS CO., LTD	APPROVAL BY	CHECK BY	PREPARE BY
AMEND DATE					
PUBLISH DATE					

DWG No.

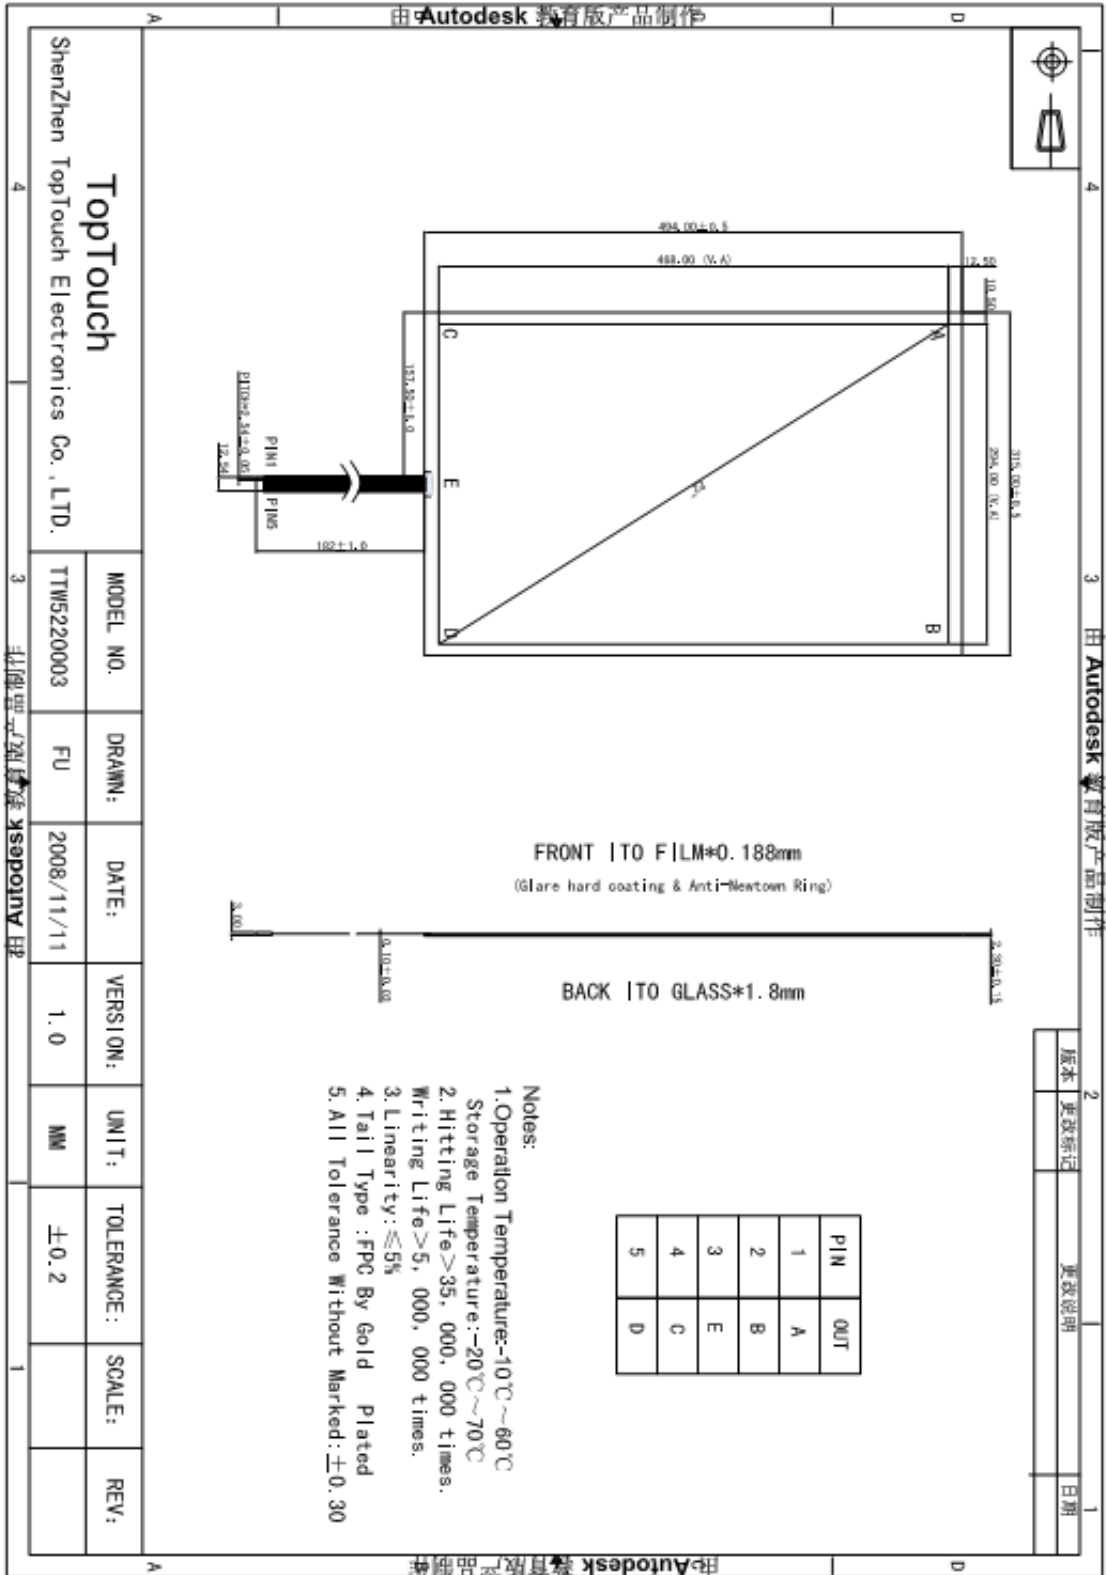

Model No.	TOP - TOUCH ELECTRONICS CO.LTD	Unit: mm	DATE:
			Amend Date:

	Touch Panel Specification	Issue No.	
SET	Optical & Electrical	Page	4

4. Optical Performance
 Light transparency should keep above 78.7%↑ under the visible wave when the wave length is 550nm.

5. Electrical Performance

5.1 Connector Resistance
 30Ω < X Axis < 350Ω
 30Ω < Y Axis < 350Ω

5.2 Insulation Resistance
 20MΩ↑ @ DC 25V

5.3 Electrostatic Endurance
 No abnormal appearance after 10kv, 100Ω, 250PF electrostatic used.

5.4 Linearity
 X Axis: 5% ↓
 Y Axis: 5% ↓

5.5 Operating Voltage
 3V ~ 12V DC

5.6 Operating Current
 5mA ~ 25mA °

AMEND NO		TOP-TOUCH ELECTRONICS CO., LTD	APPROVAL BY	CHECK BY	PREPARE BY
AMEND DATE					
PUBLISH DATE					

	Touch Panel Specification	Issue No.	
SET	Reliability Test	Page	5

6. Environment Test

6.1 High Temperature Test

After putting panels at 70°C for 240 hours, then leaving for 24 hours at room temperature.

A. Resistance between leads

30Ω < X Axis < 350Ω

30Ω < Y Axis < 350Ω

B. Linearity

X Axis : ±5%↓

Y Axis : ±5%↓

C. Insulation Resistance

20MΩ↑ @ DC25V

6.2 Low Temperature Test

After putting panels at -20°C for 240 hours, then leaving for 24 hours at room temperature.

A. Resistance between leads

30Ω < X Axis < 350Ω

30Ω < Y Axis < 350Ω

B. Linearity

X Axis : ±5%↓

Y Axis : ±5%↓

C. Insulation Resistance

20MΩ↑ @ DC25V

6.3 Temperature and Humidity Test

After putting panels at 40°C, 90%RH for 240 hours, then leaving for 24 hours at room temperature.

A. Resistance between leads

30Ω < X Axis < 350Ω

30Ω < Y Axis < 350Ω

B. Linearity

X Axis : ±5%↓

Y Axis : ±5%↓

C. Insulation Resistance

20MΩ↑ @ DC25V

AMEND NO		TOP-TOUCH ELECTRONICS CO., LTD	APPROVAL BY	CHECK BY	PREPARE BY
AMEND DATE					
PUBLISH DATE					

6.4 Repetition of High and Low Temperature and Test

After putting panels at the condition of -20°C for 30 minutes and then 70°C for 30 minutes and this process is repeated by 20 cycles , then leaving for 24 hours at room temperature.

A. Resistance between leads


30Ω < X Axis < 350Ω
 30Ω < Y Axis < 350Ω

B. Linearity

X Axis : ±5%↓
 Y Axis : ±5%↓

C. Insulation Resistance

20MΩ↑ @ DC25V

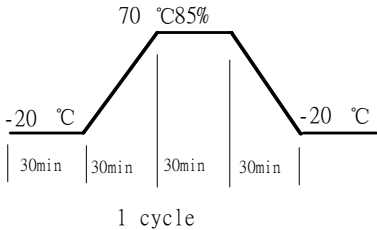

6.5 punching life

After punching 10,000,000 times with the R8.0 silicon rubber Force : 60g , Speed : 5/sec

A. Resistance between leads

30Ω < X Axis < 350Ω
 30Ω < Y Axis < 350Ω

B. Linearity


X Axis : ±5%↓
 Y Axis : ±5%↓

C. Insulation Resistance

20MΩ↑ @ DC25V

6.6 Impact Resistance

No damage when φ9mm steel ball is dropped on the surface from 30cm height at 1 time.

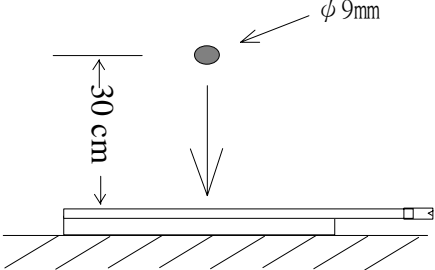


AMEND NO		TOP-TOUCH ELECTRONICS CO., LTD	APPROVAL BY	CHECK BY	PREPARE BY
AMEND DATE					
PUBLISH DATE					

	Touch Panel Specification	Issue No.	
SET	Appearance Inspection Standard	Page	7

7. Appearance

7.1 Inspection condition

- (A).The lightness of place: 500 LUX
- (B)The distance of eyeshot:30 CM(The panel must be checked under the light transparency condition.)
- (C)The angle of eyeshot: >60°
- (D)The light source of place : natural sunlight.



7.2 Inspection Standard

Suitable in the visible area. Except dot space.

1.Spot, otherness	$\phi \leq 0.5\text{mm}$	Ignorance
	$\phi > 0.5\text{mm}$	NG
2. Rub	$\phi \leq 1.0\text{mm}$	Ignorance
	$1.0\text{mm} < \phi \leq 1.5\text{mm}$	2 point above & distance > 50mm
	$\phi > 1.5\text{mm}$	NG
3.Cicatrices (Line) L:Length W:Width	$L < 10.0\text{mm}$ & $0.15\text{mm} < W \leq 0.2\text{mm}$	1 line is allowable 2 lines are reject 2 point above & distance > 50mm
	$W \leq 0.15\text{mm}$	Ignorance
	$W > 0.20\text{mm}$	NG
4. Edge warp	Edge warp $\leq 0.5\text{mm}$	Ignorance
	Edge warp $> 0.5\text{mm}$	NG

7.3 Quality inspection standard:

- Adapt to AQL MIL-STD-105D
- Samples inspection QTY: according to AQL MIL-STD-105D(Charter I)
- Inspection Base: according to AQL MIL-STD-105D(Charter II)
- Broken seriously(othersness, scrape)0.01% --- Cr (Critical Defect)
- Obvious(othersness, scrape)0.65% ----- Ma(Major Defect)
- Not obvious(othersness, scrape)2.5% ----- Mi(Minor Defect)

AMEND NO		TOP-TOUCH ELECTRONICS CO., LTD	APPROVAL BY	CHECK BY	PREPARE BY
AMEND DATE					
PUBLISH DATE					

	Touch Panel Specification		Issue No.		
SET	Packing & Others		Page	8	
<p>8.Packing Detail</p> <p>8.1 Packing: Can't have otherness on panel. Pack with EPE material.</p> <p>8.2 Delivery: For Avoiding the badly affect to the product quality, shouldn't delivery in the situation of high humidity and unusually high or low temperature</p> <p>9.Others</p> <p>(1) If there is any question in specification , the decision depends on conferment between manufacturer and customer.</p> <p>(2) If there is any change in specification , can't actualize without document permit.</p> <p>(3) The specification content is different from the individual specification one, decision bases on the latter.</p>					
AMEND NO		TOP-TOUCH ELECTRONICS CO., LTD	APPROVAL BY	CHECK BY	PREPARE BY
AMEND DATE					
PUBLISH DATE					